




BLOWER DC FANS

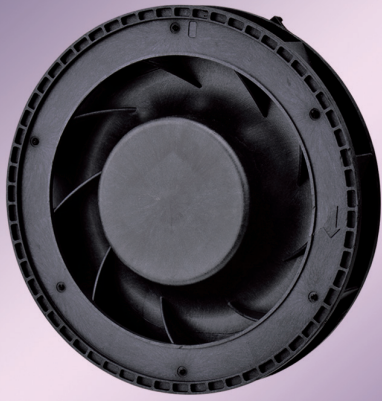

BATA SERIES 100×25 mm

- * Material: Impeller & Frame: Plastic (UL 94V-0) / Die-Casting Aluminum
- * Lead Wires: UL 1007 AWG #24 or Equivalent
- * Impeller: 9 Blades
- * Rotational direction CCW view from front face
- * Weight: 140g (4.938 OZ)

| MODEL | | Bearing Type | Rated Voltage | Operating Voltage Range | Rated Current | Rated Input Power | Speed | Maximum Air Flow | Maximum Air Pressure | Acoustic Noise | Life expectancy L ₁₀ @40°C | | |
|-------------|----------|--------------|---------------|-------------------------|---------------|-------------------|--------|---------------------|----------------------|--------------------|------------------------------------------|------|-------|
| PART NO. | SIGNAL | B.T.S.R | VDC | VDC | Amp | Watt | R.P.M. | m ³ /min | CFM | mmH ₂ O | IN H ₂ O | dB-A | hours |
| BATA1025_85 | -FG / RD | B | 48 | 36.0 to 75.0 | 0.42 | 20.16 | 6700 | 1.997 | 70.52 | 62.8 | 2.472 | 65.1 | 70000 |

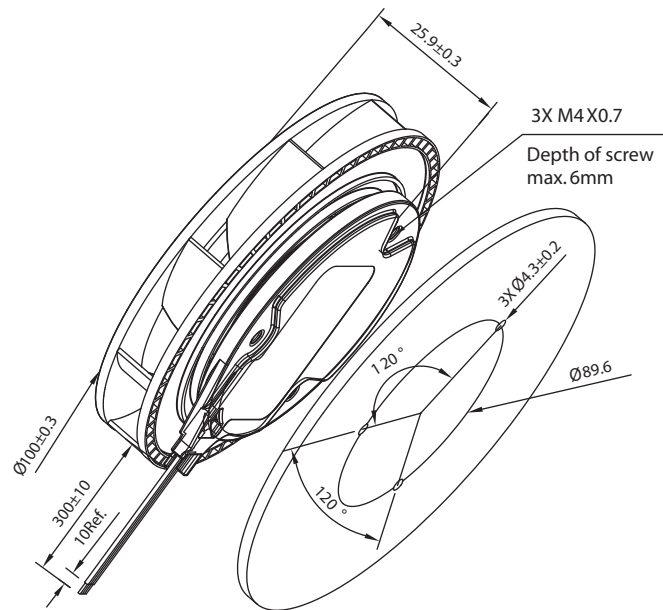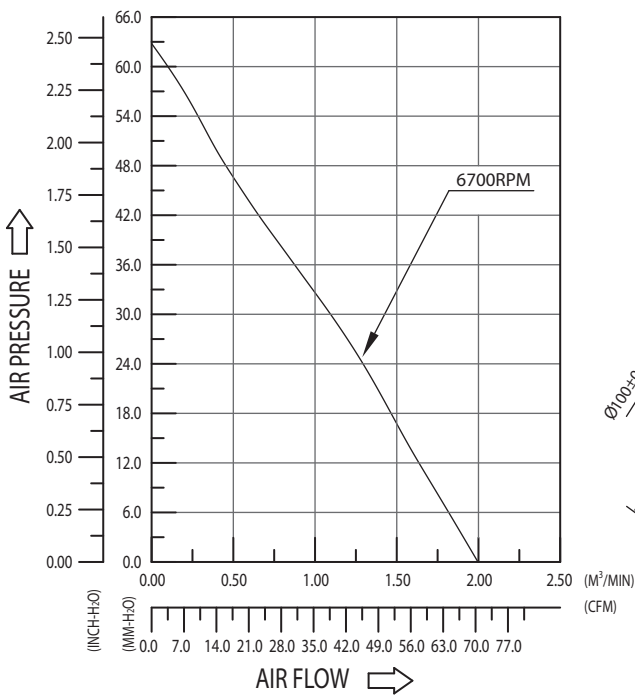

BLOWER DC FANS



BNTA SERIES Ø100×25 mm

- * Material: Impeller: Plastic (UL 94V-0) & Frame: Diecast Aluminum
- * Lead Wires: UL 1007 AWG #24 or Equivalent
- * Impeller: 9 Blades
- * Rotational direction CW view from front face
- * Weight: 123g (4.34 OZ)

| MODEL | | Bearing Type | Rated Voltage | Operating Voltage Range | Rated Current | Rated Input Power | Speed | Maximum Air Flow | | Maximum Air Pressure | | Acoustic Noise | Life expectancy L ₁₀ @40°C |
|-------------|--------|--------------|---------------|-------------------------|---------------|-------------------|--------|---------------------|-------|----------------------|---------------------|----------------|------------------------------------------|
| PART NO. | SIGNAL | B.T.S.R | VDC | VDC | Amp | Watt | R.P.M. | m ³ /min | CFM | mmH ₂ O | IN H ₂ O | dB-A | hours |
| BNTA1025B8S | -FG | B | 48 | 36 to 56 | 0.42 | 20.16 | 6700 | 1.997 | 70.52 | 62.80 | 2.472 | 65.1 | 120000 |

